

This document contains proprietary information and such information may not be disclosed to others for any purposes, not used for sales/marketing/procurement purposes without written permission

REV	DESCRIPTION OF REVISION	Date	Approved
A	Initial Release	2017/3/29	2017/3/29

1. Electrical


- 1.1 Impedance: 50 Ohm
- 1.2 Frequency: 0-40G
- 1.3 VSWR: 1.3

2. Environmental&Mechanical

- 2.1 Temperature range : - 55° ~ + 165°
- 2.2 RoHs Compliant YES
- 2.3 Durability:500 times

3. Material& Finish

- 3.1 Cable: 3507 cable; Length:1000mm
- 3.2 2.92 male connector
 - Center conductor: beryllium bronze with gold plating
 - Boby: Stainless steel passivated
 - Isolator: PEI

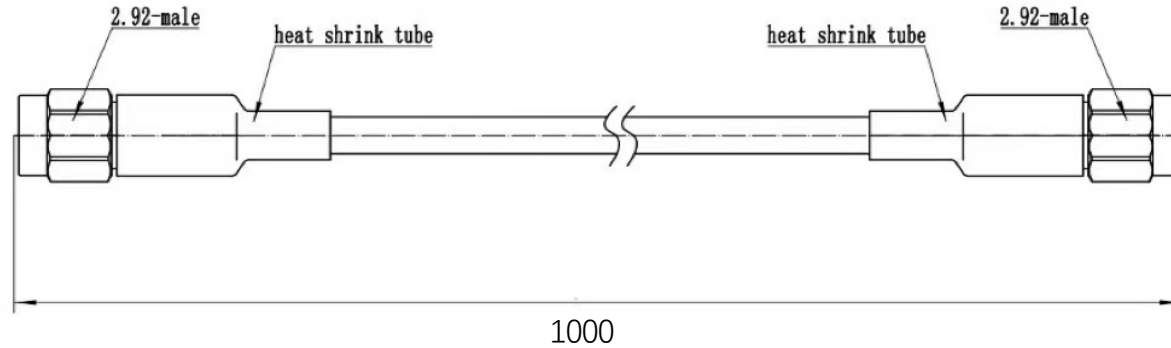

Notes:

- 1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE NOTICE AT ANY TIME
- 2.CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

Xi'an Reach-line Technology Co., Limited
Description: 2.92 male to 2.92 male cable assembly
Part No. : 2.92-J3507/2.92-J3507 L=1000mm
DIMENSION IN MILLIMETERS(mm)