

This document contains proprietary information and such information may not be disclosed to others for any purposes, not used for sales/marketing/procurement purposes without written permission


REV	DESCRIPTION OF REVISION	Date	Approved
A	Initial Release	2017/3/17	2017/3/17

1. Electrical
  - 1.1 Impedance: 50 Ohm
  - 1.2 Frequency: 27
  - 1.3 VSWR: 1.25

2. Environmental&Mechanical
  - 2.1 Temperature range : - 55° ~ + 165°
  - 2.2 RoHs Compliant YES
  - 2.3 Durability:500 times

3. Material& Finish
  - 3.1 Cable: Superflex cable; Length:1000mm
  - 3.2 SMA male connector

Center conductor: beryllium bronze with gold plating  
 Body: Stainless steel passivated  
 Isolator: PTFE

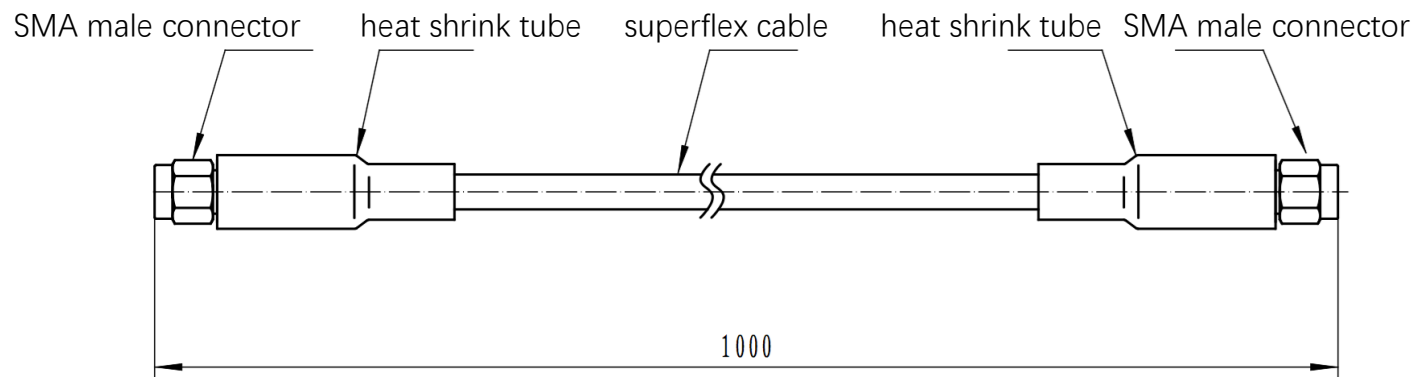

Notes:

1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE NOTICE AT ANY TIME
- 2.CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

**Xi'an Reach-line Technology Co., Limited**

Description: SMA male to SMA male superflex cable assembly  
 27G L=1000mm

Part No. : SMA-J/SMA-J

DIMENSION IN MILLIMETERS(mm)