

This document contains proprietary information and such information may not be disclosed to others for any purposes, not used for sales/marketing/procurement purposes without written permission

REV	DESCRIPTION OF REVISION	Date	Approved
A	Initial Release	2018/3/17	2018/3/17

1. Electrical

1.1 Impedance: 50 Ohm

1.2 Frequency: 0-26.5G

1.3 VSWR: 1.45

2. Environmental&Mechanical

2.1 Temperature range : -55°~ +165°

2.2 RoHs Compliant YES

2.3 Durability:500 times

3. Material& Finish


3.1 Cable: Low loss 3506 cable; Length:610mm/2000mm/2500mm

3.2 SSMP female connector

Center conductor: Beryllium bronze with gold plating

Boby: beryllium bronze with gold plating

Isolator: PTFE

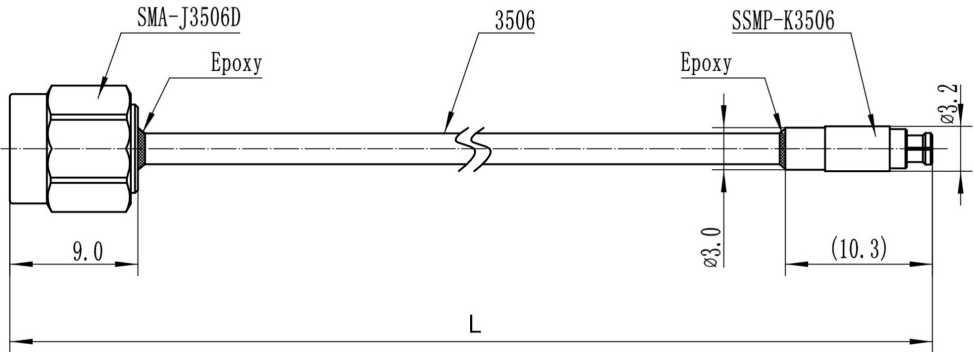

Notes:

1.ALL SPECIFICATIONS ARE SUBJECT TO CHANGE NOTICE AT ANY TIME

2.CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

Xi'an Reach-line Technology Co., Limited

Description: SMA male to SSMP female cable assembly

Part No.: RL-SMA-J/SSMP-K-610/2000/2500

DIMENSION IN MILLIMETERS(mm)