

This document contains proprietary information and such information may not be disclosed to others for any purposes, not used for sales/marketing/procurement purposes without written permission

REV	DESCRIPTION OF REVISION	Date	Approved
A	Initial Release	2017/8/29	2017/8/29

1. Electrical

1.1 Frequency: 0-26.5G

1.2 Impedance: 50 Ohm

1.3 VSWR: 1.25

1.4 Power: 0.5W/1W/2W

2. Environmental&Mechanical

2.1 Temperature range: $-55^{\circ} \sim +125^{\circ}$

2.2 RoHs Compliant: Yes


2.3 Durability:500 times

3. Material& Finish

3.1 Inner Contact: Beryllium bronze with gold-plated

3.2 Outer Contact: Stainless steel, passivated

3.3 Insulators: PTFE

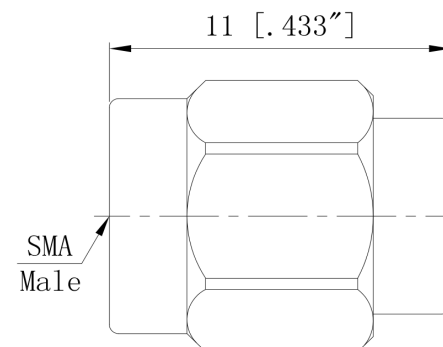

Notes:

1.ALL SPECIFICATIONS ARE SUBJECT TO CHANGE NOTICE AT ANY TIME

2.CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

Xi'an Reach-line Technology Co., Limited

Description: 2W SMA male terminations

Part No.: RLTS0227M

DIMENSION IN MILLIMETERS(mm)