

This document contains proprietary information and such information may not be disclosed to others for any purposes, not used for sales/marketing/procurement purposes without written permission

REV	DESCRIPTION OF REVISION	Date	Approved
A	Initial Release	2018/8/29	2018/8/29

1. Electrical


- 1.1 Frequency: 0—40G
- 1.2 Impedance: 50 Ohm
- 1.3 VSWR: 1.35
- 1.4 Power: 1W

2. Environmental&Mechanical

- 2.1 Temperature range: $-55^{\circ} \sim +165^{\circ}$
- 2.2 RoHs Compliant Yes
- 2.3 Durability: 500 times

3. Material& Finish

- 3.1 Inner Contact: Beryllium bronze with gold-plated
- 3.2 Outer Contact: Beryllium bronze with gold-plated
- 3.3 Insulators: PEI

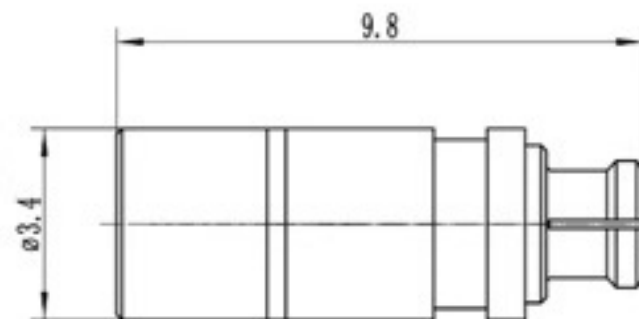

Notes:

- 1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE NOTICE AT ANY TIME
- 2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

Xi'an Reach—line Technology Co., Limited

Description: SSMP male termination

Part No.: RLTSP0140F

DIMENSION IN MILLIMETERS(mm)